


ACCESSIBLE SIGN


SIGN MAY BE MOUNTED ON POST OR BACKING.

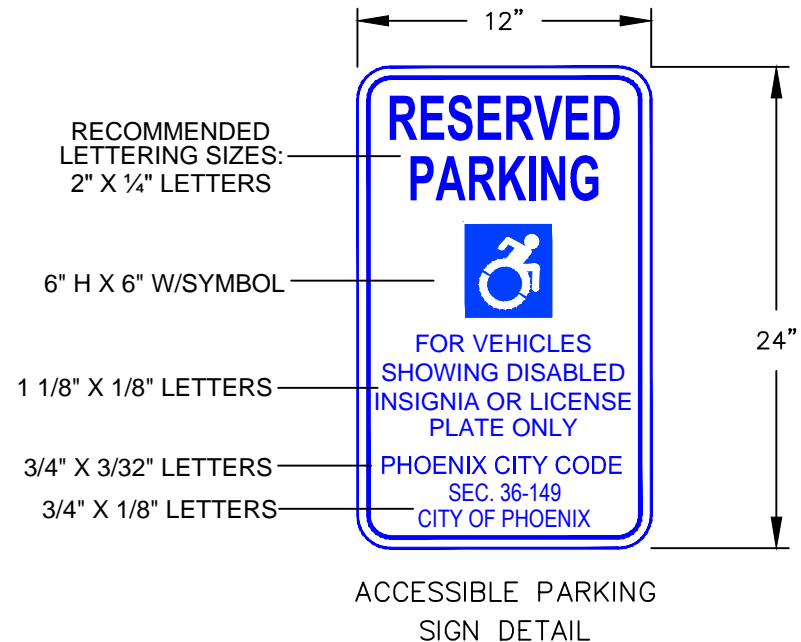

- ① ACCESSIBLE PARKING SPACES SHALL BE DESIGNATED AS RESERVED FOR PERSONS WITH DISABILITIES BY A SIGN SHOWING THE INTERNATIONAL WHEELCHAIR SYMBOL. PREFERRED SYMBOL SHOWN.
- ② THE SIGN MUST HAVE THE MINIMUM VERBIAGE OF "RESERVED PARKING", INTERNATIONAL WHEELCHAIR SYMBOL AND PHOENIX CITY CODE SEC. 36-149
- ③ THE SIGN PLATE SHALL BE A MINIMUM OF 12" X 24" WITH A THICKNESS OF 0.080 ALUMINUM CONSTRUCTION.
- ④ THE SIGN FACE SHALL HAVE A WHITE REFLECTIVE BACKGROUND WITH A BLUE LEGEND. (STANDARD 3M SCOTCHLITE SIGN FACE NUMBER R7-32 OR EQUIVALENT, WITH BLUE SCREEN PRINTED LETTER AS SHOWN ABOVE.)
- ⑤ ONE IN SIX COVERED ACCESSIBLE SPACES SHALL BE DESIGNATED FOR HIGH PROFILE. UNLESS ALL SPACES ARE HIGH PROFILE SPACES AN ADDITIONAL SIGN DESIGNATING "VAN ACCESSIBLE" SHALL BE INCLUDED.
- ⑥ THE SIGNS SHALL BE ON A STATIONARY POST OR APPROVED WALL LOCATION. THESE SIGNS SHALL NOT BE OBSCURED.
- ⑦ THE BOTTOM OF THE SIGN(S) SHALL BE LOCATED NO LESS THAN FIVE (5) FEET OR MORE THAN SIX (6) FEET ABOVE THE GRADE (PARKING LOT SURFACE) AND SHALL BE VISIBLE DIRECTLY IN FRONT OF THE PARKING SPACE.


ACCESSIBLE PARKING REQUIREMENTS
 PER CITY OF PHOENIX ZONING ORDINANCE SEC. 702.G
 Sheet 1 March 2013



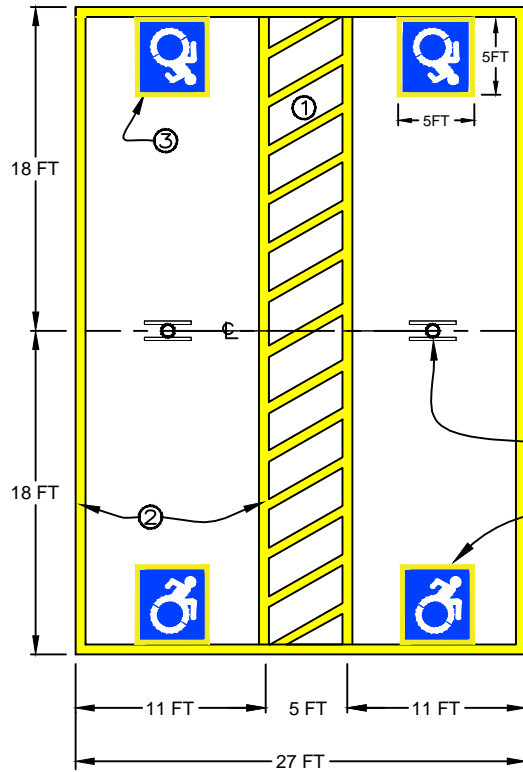

BACK TO BACK
ACCESSIBLE PARKING


ACCESSIBLE PARKING REQUIREMENTS
PER CITY OF PHOENIX ZONING ORDINANCE SEC.702.G
Sheet 2 March 2013

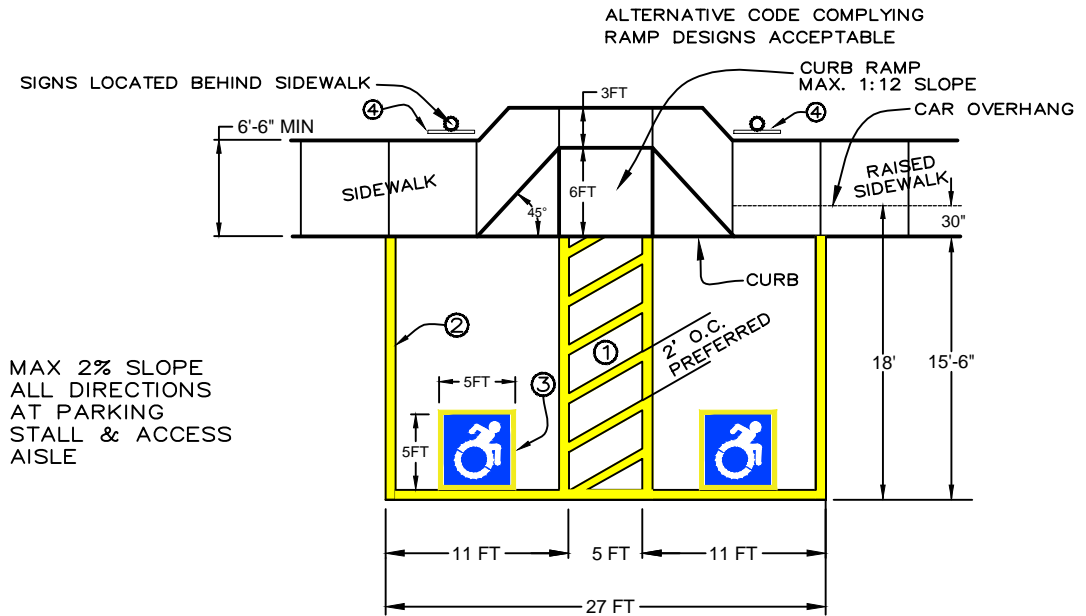

DOUBLE ACCESSIBLE PARKING

NOTES:


- ① 5 FT ACCESS AISLE REQUIRED. ACCESS AISLES LOCATED ON EITHER SIDE OF THE PARKING SPACE EXCEPT FOR ANGLED PARKING SPACES WHICH SHALL HAVE ACCESS AISLES LOCATED ON THE PASSENGER SIDE OF THE PARKING SPACES.
- ② ACCESS SPACES MUST BE PROMINENTLY OUTLINED IN COLORS OR MATERIALS CONTRASTING FROM REGULAR PARKING SPACES
 - * 4" OUTLINE STRIPING REQUIRED (TRAFFIC YELLOW PREFERRED)
 - * ACCESS AISLE SHALL BE CLEARLY MARKED (CROSSHATCHING STRIPES SPACE 2 FT O.C. PREFERRED)
- ③ INTERNATIONAL ACCESSIBLE SYMBOL REQUIRED, BLUE AND WHITE SYMBOLS PREFERRED. A SYMBOL CAN BE DISPLAYED WITHOUT BLUE BACKGROUND. PREFERRED SYMBOL SHOWN.
- ④ ACCESSIBLE SIGN REQUIRED – MUST NEVER BE OBSCURED. RECOMMENDED LOCATION IS TO BE NO GREATER THAN 10 FEET FROM CURB.
- ⑤ ONE OUT OF EVERY 6 SPACES SHALL BE VAN ACCESSIBLE AND HAVE A MINIMUM VERTICAL CLEARANCE OF 8 FT 2 INCHES AT GARAGE AND UNDER CONOPIES. THE VERTICAL SIGN SHALL CONTAIN THE DESIGNATION "VAN ACCESSIBLE"
- ⑥ CURB STOPS ARE REQUIRED WHERE SIDEWALKS ARE FLUSH WITH THE PARKING SPACES. CURB STOPS AT OTHER LOCATIONS ARE OPTIONAL.
- ⑦ SEE PARKING AREA DIMENSION POLICIES FOR ANGLED PARKING.
- ⑧ WHERE A TOTAL OF 4 OR FEWER PARKING SPACES ARE PROVIDED, IDENTIFICATION OF ACCESSIBLE PARKING SPACES SHALL NOT BE REQUIRED. ACCESSIBLE PARKING SPACE DIMENSIONS SHALL BE MAINTAINED AND THE ACCESS AISLE SHALL BE PROVIDED.
- ⑨ SEE ZONING ORDINANCE SECTION 702 AND SHEET 3 FOR THE LAYOUT SPECIFICATION FOR ASSIGNED MULTI FAMILY ACCESSIBLE PARKING SPACES.

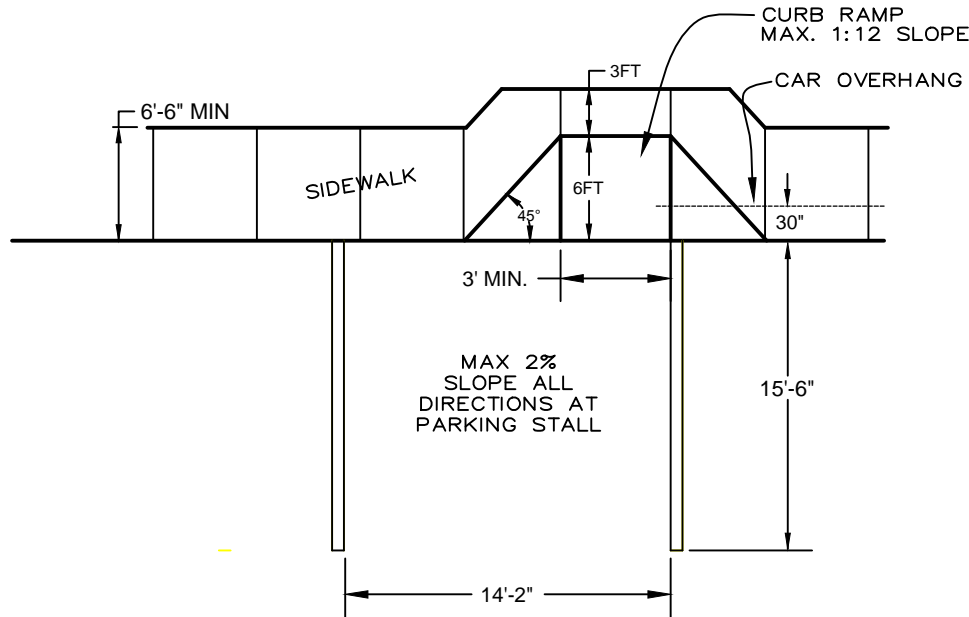

ADAPTABLE/ACCESSIBLE PARKING SPACE
(ASSIGNED MULTI FAMILY)

- * COMBINED PARKING STALL AND AISLE
- * MIN. VERTICAL CLEARANCE OF 80"
- * ASSIGNED PARKING SPACES ARE NOT REQUIRED TO BE STRIPED, SIGNED OR MARKED AS ACCESSIBLE PARKING

ACCESSIBLE PARKING REQUIREMENTS
 PER CITY OF PHOENIX ZONING ORDINANCE SEC. 702.G
 Sheet 3 February 2013

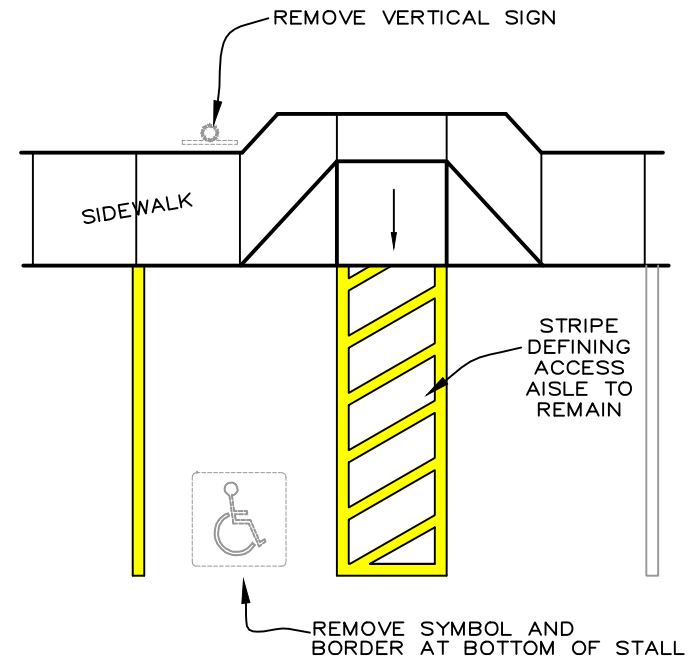

EXISTING ACCESSIBLE SPACE CONVERTED TO ADAPTABLE/ACCESSIBLE
(ASSIGNED MULTI FAMILY)

- * SEE PLANNING AND DEVELOPMENT DEPARTMENT TRAFFIC PLAN REVIEW SECTION FOR APPROVAL TO IMPLEMENT THIS OPTION